



IMÅGE-X SERIES

In-Wall Speakers

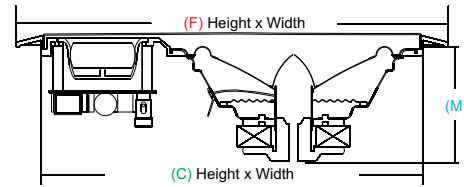

	Imåge-5X	Imåge-6X	Imåge-8X	Imåge-C25X
(F) Frame	279mm x 192mm	306mm x 220mm	362mm x 256mm	448mm x 221mm
(C) Cut Out Hole	248mm x 162mm	275mm x 190mm	326mm x 230mm	415mm x 188mm
(M) Mounting Depth	65mm	85mm	93mm	75mm

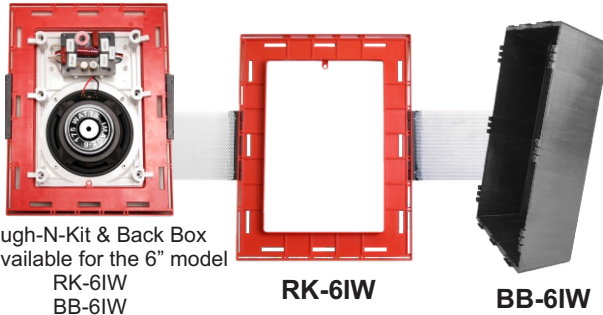

Rough-N-Kit & Back Box are available for the 6" model
RK-6IW
BB-6IW

RK-6IW

BB-6IW

OBJECTIVE

The Imåge-X 2-Way in-wall speaker systems are designed to deliver unmatched quality and value. Their ability to reproduce the full ranges of music with no strain or distortion earn them high marks in multitasking.

Their smooth reproduction of music with no overhang is the product of an elaborate signal processing network that is so precise, it allows for seamless sound transition. The Image speaker system is designed to channel the impact of special effects onto viewers in crystal-clear, subtle fashion that makes listeners become part of the scene.

Imåge-X speakers gently lend themselves to the interior of any home, they bring the excitement and the drama of crisp clean music and theater to your kitchen, bedroom, or home theater.

INTENDED USE

- ✓ Bandwidth: Full Range
- ✓ Home Theater/5.1 & 2-Channel/Music Systems
- ✓ New Construction & Retrofit Applications
- ✓ Plasma Install Flush In-wall Home Theater
- ✓ Can Be Used in Both Yachts and RV's

SPECIAL FEATURES & HIGHLIGHTS

- High sensitivity and power handling (another way that Earthquake delivers value and performance in one low cost package)
- Easy install spring loaded terminals
- Paintable rust-proof aluminum grilles for superior protection and job flexibility
- Swiveling 1" silk dome, neodymium tweeters
- Easy adjust bass/treble trim
- Turn-N-Lock installation for safe, efficient and professional installs
- Poly injection composite drivers for smooth wide range response with no distortion
- Long life, moisture resistant materials for safe use in kitchens, bathrooms and atriums
- Style easily integrates with Earthquake IQ and Imåge in-ceiling speakers and Thor in-wall subwoofers

SPECIFICATIONS

	Imåge-5X	Imåge-6X	Imåge-8X	Imåge-C25X
RMS Power Handling	120 Watts	175 Watts	250 Watts	200 Watts
Frequency Response	65Hz - 21Hz	52Hz - 21kHz	52Hz - 21kHz	50Hz - 21kHz
Woofer	5-1/4"	6-1/2"	8"	5-1/4" x Two
Tweeter	1" silk dome			
MSRP	€ 336/pair	€ 378/pair	€ 420/pair	€ 308/pair