

Stainless Steel Blue Illuminated Push Button



Highlights

- ✓ Front panel mounting
- ✓ Ring illumination
- ✓ Single pole push to make
- ✓ Screw terminals
- ✓ Separate LED terminals (outer terminals '+' and '-')

No resistor fitted. An appropriate resistor for the LED must be connected in series by the user.


For example: 1kOhm for 12V or 2.2kOhm for 24V).

This series resistor is already implemented in the Soft Start module.

Specifications

Colour	Blue
Luminous Intensity	1500mcd
Forward Voltage	3.5V
Forward Current	20mA
Operating Pressure	12N
Rear nut fixing torque	0.57nM
Screw terminal torque	0.2Nm max.
Max. Switch Rating	50mA, 24Vdc

Not suitable for switching mains voltages!

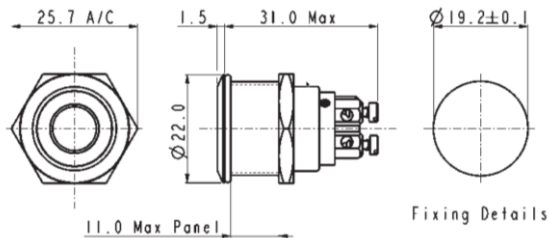

Dimensions are in mm.

Please make sure you always download the latest datasheet from our website.